

## KRAIBURG rubber coverings on slatted floors

### prerequisites:




#### slatted floor elements:

- fit together horizontally and vertically
- bearing capacity is guaranteed
- urinary sediment and other thick sediments must be removed from the slats of the slatted floor, to ensure even clamping of fastening elements


#### mats:

even temperature:  
minimum 5° C to maximum 30° C (store according to initial temperature)




### You will need this:


#### measuring:




#### marking:



#### cutting:



#### fastening:




#### KRAIBURG fastening elements:




(fastening elements are part of delivery)

#### ! scraper:


**either** use scraper systems specially adapted to rubber floors **or** in case of structural alteration: adapt existing scraper facilities according to the **KRAIBURG guidelines for manure scrapers for systems with KRAIBURG rubber coverings on slatted floors**




#### ! mobile manure removal and trafficability: comply with **KRAIBURG guidelines for trafficability**



## 1 Lay out mats

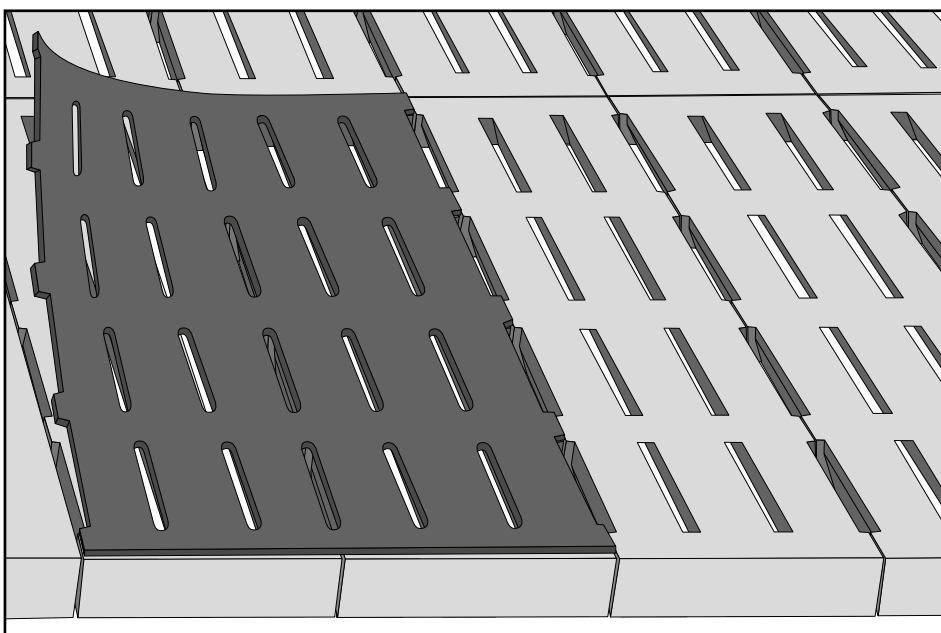


## ② Adaptation




if necessary, cut mats to fit

### **i** tips for cutting:


- moisten the blade lightly
- pull the mats slightly apart (use pliers for pulling small pieces apart)
- a power jig saw is most suitable for cutting **pediKURA®** and **profikURA**




## ③ Fastening




slide the plastic elements onto the rubber wedges




slide past the indentations



put fixing into warm water (lubrication)



drive the rubber wedges through the gaps in the mat



fixing flush with the mat

### **i** if some fastening elements cannot be pounded in, or only with great difficulty:

- check that urinary sediments, i.e. other thick sediments have been removed / if necessary remove them
- narrower slats, due to manufacturing tolerances need no fastening elements in some cases

**!** **mats with varying slit widths:** be careful to use the correct fixing size for the respective slit width in your slatted floor (look at the overview on your package of fastening elements)

**i** **tip:** Occasionally the mats can be lifted up by the animals. If this happens, affix the mat again. It is no problem if a few fastening elements get lost.